


AQUA-70-LED

IP 66, IP67, IP68, IP69K

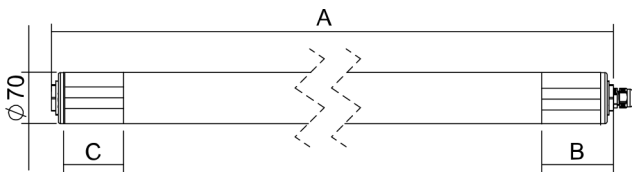

Application:

car wash, chemical industry, water tanks and swimming pools.

Ballast:

EP – electronic ballast 220 – 240 V / 50 Hz-60Hz AC, 176-280 V DC

Body:

plastic tube with outer diameter of 70 mm and wall thickness 4 mm made from opal PC (polycarbonate) - IK10 or opal PMMA – IK06, sealing plugs at the ends of tube

Fastening:

fastening on ceiling or wall lighted area with mounting brackets, suspension by means of self-locking suspenders or with suspension brackets

Fastening:

screw connector terminal block, max. diameter of wires 2,5 mm²

Calculated lifetime – LED modules:

L80B10 ta40 – 70 000h
L70B10 ta40 – 100 000h

On request:

- Em – non-maintained emergency lighting (1h, 3h)
- MULTI – maintained emergency lighting (1h, 3h)
- DIM – dimmable electronic ballast (DSI, DALI)
- 2.7K-6.5K – colour temperature
- 1/3 F – one or three phase through-wiring connection
- NANO – light fixture protected by special nanolayer (hydrophobic, oleophobic or antibacterial protection)
- GESIS – possibility to equip light fixtures with connectors


| 1 | | To/A | (lm)* | (W)** | AxBxC (mm) |
|-------------------------|---|------|-------|-------|------------|
| -20°C ≤ t ≤ 40°C | | | | | |
| 084131 | AQUA-70-LED-FL-5000-4K, IP66/IP67/IP68/IP69, l= 1250mm | 4000 | 3806 | 34 | 1250×70×70 |
| 084151 | AQUA-70-LED-FL-PMMA-5000-4K, IP66/IP67/IP68/IP69, l= 1250mm | 4000 | 3909 | 34 | |
| 084132 | AQUA-70-LED-FL-7500-4K, IP66/IP67/IP68/IP69, l= 1750mm | 4000 | 5709 | 52 | 1750×70×70 |
| 084152 | AQUA-70-LED-FL-PMMA-7500-4K, IP66/IP67/IP68/IP69, l= 1750mm | 4000 | 5864 | 52 | |
| -20°C ≤ t ≤ 50°C | | | | | |
| 084130 | AQUA-70-LED-FL-2500-4K, IP66/IP67/IP68/IP69, l= 750mm | 4000 | 1910 | 17 | 750×70×70 |
| 084150 | AQUA-70-LED-FL-PMMA-2500-4K, IP66/IP67/IP68/IP69, l= 750mm | 4000 | 1954 | 17 | |

Accessories


- 053629 Mounting bracket AQUA-70 dark grey (1 pc)
- 053630 Mounting bracket AQUA-70 bright grey (1 pc)
- 053627 SS mounting bracket AQUA-70 (1 ks)

(lm)* - luminous flux (W)** - power input

AQUA-70-LED-PMMA, IP66, IP67, IP68, IP69K

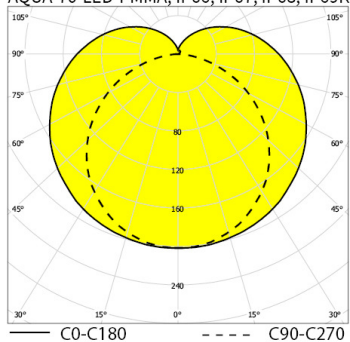

AQUA-70-LED-PC, IP66, IP67, IP68, IP69K

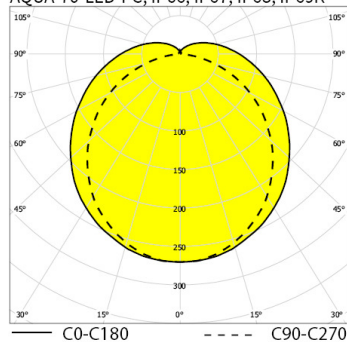

053627



053630



053629